

SafeGate® smart

Safe Gate® smart self service terminal removes the reliance on manual checks for test and vaccination status.

Users present their vaccination/test pass (QR code) at Safe Gate® terminal. SafeGate® scans and checks the status and issues an authorisation pass. This can simply be stuck to clothing if wished or retained for display on request. For maximum flexibility, SafeGate® smart is weather sealed for outdoor use as well as indoor use.


An investment in the safety and health of your visitors, guests and employees.



SafeGate® smart – self service terminal

Functions at a glance


- Contactless query & check of test, vaccination or recovery status
- The system's built-in scanner can read QR code-based, verified test and vaccination status.
- An access authorisation is generated after successful verification of test/vaccination/recovery status.
- A printed access authorisation can be visibly attached to clothing via adhesive strip. Text is freely configurable.
- Simple user guidance via display.
- SafeGate® smart is suitable for temporary use via rental models.
- For maximum flexibility, SafeGate® smart is weather sealed for outdoor use as well as indoor use.
- SafeGate® smart is easy to transport as the base is suitable for forklift trucks and pallet trucks.

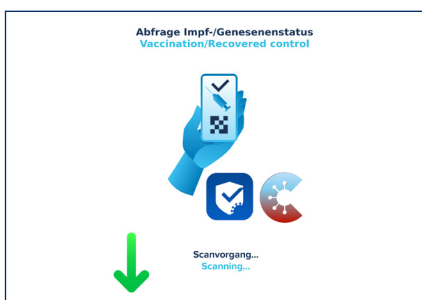

Simple user guidance via display



Example access authorisation

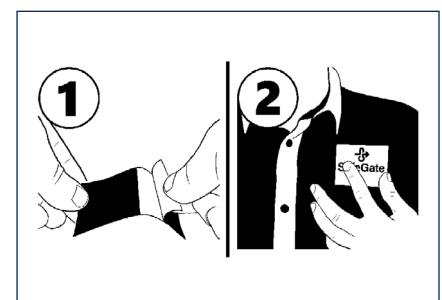

Note on attaching the access authorisation

Extract from technical data:

Housing:	Stainless Steel
Dimensions (WxHxD):	600 x 1.795 x 470 mm
Weight:	190 kg + 600 kg base
Colour/lacquer:	According to customer requirements
Operating/supply voltage:	230 V AC (180 - 264 V AC) 50 / 60 Hz
Power consumption:	240 W
Temperature range:	-20 °C bis +50 °C
Display:	21,5 Inch Display, resolution 1920 x 1080 Viewing angle 175°
Scanner:	2D Imager for processing various barcodes
Printer:	PDM 170, direct thermal printer with graphics capability <ul style="list-style-type: none">■ Printing speed: Up to 200 mm / sec■ Thermo head resolution: 300 dpi■ Print width: Maximum 81,3 mm■ Paper width: Maximum 86 mm■ utter Integrated cutter, tickets up to 350 g / m² (0.4 mm)■ Paper: Thermo paper rolls, folded stack (optional)■ Paper thickness: 0,07 to 0,4 mm (variable head proof for stable or thicker paper materials)■ Maximum ticket length: Up to 300 mm or endless strips
Base:	Beton Base <ul style="list-style-type: none">■ Suitable for forklift and pallet truck■ Weight: 600 kg

The founders of SafeGate GmbH



The information contained in this document are subject to change without notice. The illustrations, images and screenshots are examples. Krauth technology assumes no liability for any errors contained within, indirect damages or for compensation for expenses incurred by the distribution, provision and use of this material. If this document is part of a system documentation, the relevant agreements on documentation and updating apply.